

FP-VIP VORT Range




- Asynchronous single-phase electric motor with built-in thermal relay.
- STAINLESS steel motor shaft
- IP X8 Protection Class for the electric parts
- Suitable to be used at a max. temperature from 35°C up to 40°C



- All models are also available in the automatic version with float switch.
- All models come with a 10 m power cable (H05 RN-F series VIP VORT)
- All models of the VIP, VORT series have reinforcing elements in ceramic fitted on the drive motor to allow the pump to be used in continuous mode



- Max immersion depth 7 m
- Colour lithographed package
- Insulation class : F

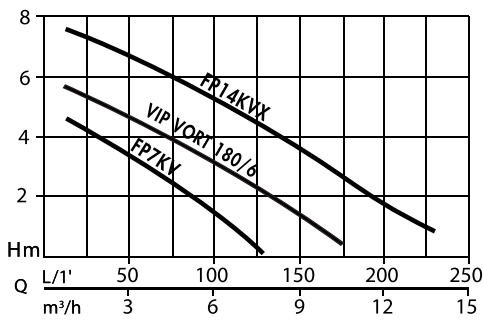

Article	N2101130	N2101140	N2101090
Barcode	8010583529043	8010583529050	8010583126082
Absorbed power	350 W	600 W	480 W
Max Head / pressure	5 m / 0,5 bar	8 m / 0,8 bar	6 m / 0,6 bar
Flow rate	7800 l/h	14000 l/h	10800 l/h
Voltage	230V - 50hz	230V - 50hz	230V - 50hz
Rated currents	1.6A	2.5A	2.1A
Max. advised suction depth	7m	5m	7m
Start / stop level	330mm/150mm	370mm/190mm	370mm/150mm
Pump Body	Polypropylène	Stainless steel	Polypropylène
Impeller	Noryl	Reinforced fiberglass	Noryl
Minimum draining level	25 mm	36,5 mm (manuel)	30 mm (manuel)
Max. size of impurities	25 mm	22 mm	25 mm
Pump outlet	41.90 mm (1" 1/4 M)	41.90 mm (1" 1/4 M)	41.90 mm (1" 1/4 M)
Max. temperature of fluid	35°	35°	40°
Accessories	Adjustable connector Ø 32mm	Adjustable connector Ø 32mm	Adjustable connector Ø 25mm and 32mm