

FP-VIP Range




Models with a floating switch can even run automatically. The wide range of models enables every user to find the pump that best suits his needs.



Suitable for clear water with a maximum temperature from 35°C up to 40°C



The submersible pumps of the FLOTEC "VIP" line have ceramic reinforcing elements on the shaft that guarantees a longer life and enables them to be used in continuous mode.

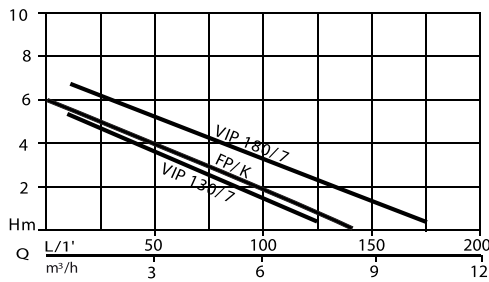

FP7K



VIP 130/6 auto



continuous duty

VIP 180/7 auto



continuous duty

Article	N1041200	N1041100	N1041120
Barcode	8010583529036	8010583126044	8010583126068
Absorbed power	250 W	320 W	370 W
Max Head /pressurei	6 m / 0,6 bar	6 m / 0,6 bar	7 m / 0,7 bar
Flow rate	7800 l/h	7800 l/h	10800 l/h
Voltage	230V - 50hz	230V - 50hz	230V - 50hz
Rated current	1.3A	1.3A	1.6A
Max depth of immersion	7 m	7 m	7m
Max temperature of pumped fluid	35° C	40° C	40° C
Start / stop level	330mm/150mm	330mm/150mm	330mm/150mm
Pump Body	Polypropylène	Polypropylène	Polypropylène
Minimum draining level	10 mm	20 mm (man.)	20 mm (man.)
Max. size of impurities	6 mm	6 mm	6 mm
Suction / delivery port	41,90 mm (1"1/4 M)	41,90 mm (1"1/4 M)	41,90 mm (1"1/4 M)
Accessories	Hose connector Ø 32 mm	Adjustable connector for threaded Ø15 ,19 and 25 mm hoses. Check valve	Adjustable connector for threaded Ø15 ,19 and 25 mm hoses. Check valve