

TRASH DUTY, SELF PRIMING AND SOLIDS HANDLING REMOVABLE INSPECTION COVER, SIC SEAL AND REPLACEABLE WEAR PLATE

B




MODEL	VOLTAGE	PORT	MAX SOLIDS	KG	H x W x L	LM/HM	kW	CODE	PRICE
B1½KQA-ST EA6E (HGM1-ST)	230v	1½"	12mm	21	285 x 185 x 375	270/12	0.75	070-001	
B2KQA-ST EAR3 (HGM2-ST)	230v	2"	14mm	24.5	300 x 185 x 375	440/15	1.5	070-002	
B3KQA-ST EAR5 (HGM3-ST)	230v	3"	26mm	32	300 x 185 x 445	775/15	2.2	070-003	
B2KQA-ST EAR4 (HG2T-ST)	415v	2"	14mm	24.5	300 x 185 x 375	440/15	1.5	070-004	
B3KQA-ST EAR6 (HG3T-ST)	415v	3"	26mm	32	300 x 185 x 445	775/17	2.2	070-005	

Self priming electric pump with three blade impeller, suitable for pumping dirty water.

This version is provided with an inspection door to remove any blockages that may occur, a wear disc made from stainless steel. A non-return valve is fitted on the inlet of the pump body to avoid the loss of water after the pump has stopped, making it easier to prime when the pump starts again. Maximum suction depth of 6 metres and a maximum liquid temperature of 60°C.

Pump casing, inlet flange and impeller are made from cast iron.

Stainless steel shaft. Silicon carbide seal. High pressure versions are available upon request.

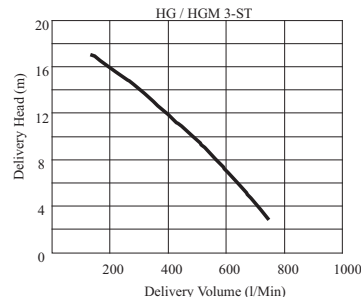

SELF PRIMING CONTRACTOR PUMPS

STAINLESS STEEL SELF PRIMING PUMPS ELECTRIC MOTOR DRIVE



B

MODEL	PORT	MAX SOLIDS	KG	H x W x L	LM/HM	kW	CODE	PRICE
EA7G★ 230v	2"	16mm	23.5	300 x 185 x 410	440/18	1.5	070-EA7G	
EA7E★ 415v	2"	16mm	23.5	300 x 185 x 410	440/18	1.5	070-EA7E	
EALT★ 415v	3"	19mm	82	400 x 280 x 635	750/25	4	070-EALT	
EALR★ 415v	3"	24mm	99	405 x 280 x 650	1320/24	5.5	070-EALR	
EALS★ 415v	3"	24mm	107	405 x 280 x 650	1400/28	7.5	070-EALS	



Self priming electric pump suitable for pumping acidic waters, sewage, transferring dilute acid, pumping fruit juice or fluid food stuff. This version is provided with an inspection door to remove any blockages that may occur. A non-return valve is fitted on the inlet of the pump body to avoid the loss of water after the pump has stopped, making it easier to prime when the pump starts again. Maximum suction depth of 6 metres and a maximum liquid temperature of 60°C. Pump casing, inlet flange and impeller and shaft are made from stainless steel. Silicon carbide seal.

★ Available upon request.

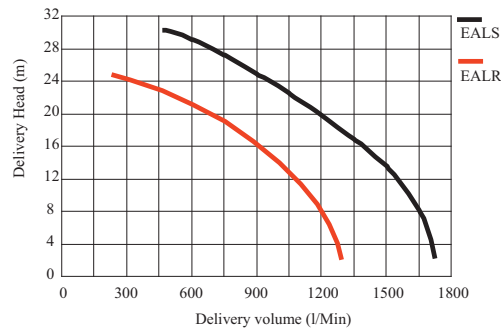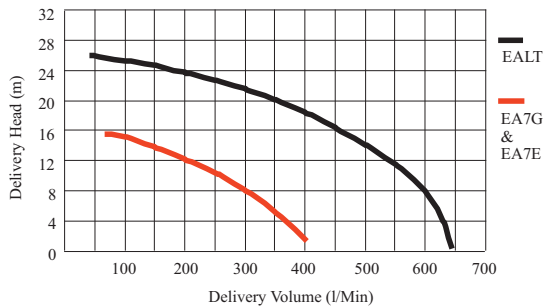

BRONZE SELF PRIMING PUMPS ELECTRIC MOTOR DRIVE



B

MODEL	PORT	MAX SOLIDS	KG	H x W x L	LM/HM	kW	CODE	PRICE
EAS8 230v	2"	16mm	25	300 x 185 x 410	450/18	1.5	070-020	
EAT1 230v	3"	25mm	33	300 x 185 x 410	900/16	2.2	070-022	
EAS9 415v	2"	16mm	25	300 x 185 x 410	450/18	1.5	070-024	
EAT2 415v	3"	25mm	33	300 x 185 x 445	750/15	2.2	070-026	
EALE★ 415v	4"	35mm	87	405 x 315 x 670	1580/15	4	070-EALE	



Self priming electric pump in bronze with open impeller that allows the passage of large solids. Suitable for pumping sea water and the circulation of swimming pools. A non-return valve is fitted on the inlet of the pump body to avoid the loss of water after the pump has stopped, making it easier to prime when the pump starts again. Maximum suction depth of 6 metres and a maximum liquid temperature of 60°C. Pump casing, inlet flange and impeller are made from bronze. Stainless steel shaft. Carbon mechanical seal. High pressure/high volume versions are available.

★ Available upon request.

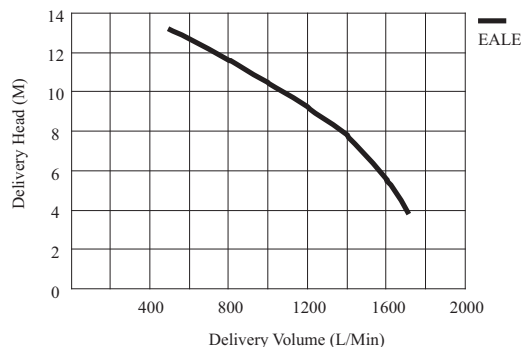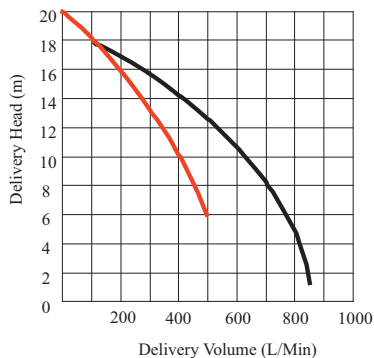

SELF PRIMING CONTRACTOR PUMPS

FUEL OIL "RED" HIGH VOLUME DIESEL FUEL TRANSFER PUMP

B

MODEL	PORT	KG	H x W x L mm	LM/HM	kW	CODE	PRICE
RED EA2L 230v	1"	15	285 x 216 x 375	120/12	0.55	070-168	
RED 3516 230v	1½"	20	300 x 180 x 375	325/15	0.75	070-3516	
RED EA2V 230v	2"	21	300 x 185 x 410	500/15	1.5	070-166	
RED EA9C 230v	3"	30	300 x 185 x 445	700/15	2.2	070-EA9C	
RED EA2M 415v	1"	15	285 x 216 x 375	120/12	0.55	070-169	
RED 3501 415v	1½"	20	300 x 180 x 375	325/15	0.75	070-163	
RED EA1S 415v	2"	21	300 x 185 x 410	500/15	1.5	070-167	
RED EAM7 415v	3"	30	300 x 185 x 445	700/15	2.2	070-165	
RED EANS 415v	3"	74	400 x 280 x 635	900/22	4.0	070-EANS	

Self priming electric pump with open impeller to transfer fuels. Suitable for pumping diesel, gas oil, paraffin. NOT FOR PUMPING PETROL. A non-return valve is fitted on the inlet of the pump body to avoid the loss of liquid after the pump has stopped, making it easier to prime when the pump starts again. Maximum suction depth of 6 metres and a maximum liquid temperature of 60°C. Pump casing, inlet flange and impeller are made from cast iron. Stainless steel shaft. Viton mechanical seal and Viton check valve.



Fuel Oil "Red"

FUEL OIL "RED" COMPLETE WITH FLAME PROOF MOTOR

B

MODEL	PORT	KG	H x W x L mm	LM/HM	kW	CODE	PRICE
RED EAZ3* 230v	1½"	15.5	300 x 255 x 495	325/15	0.75	070-EAZ3	
RED EA9D* 230v	2"	27	300 x 280 x 520	500/15	1.5	070-EA9D	
RED EA9E* 230v	3"	50	300 x 280 x 550	700/15	2.2	070-EA9E	
RED 2140* 415v	1½"	40	300 x 255 x 495	325/15	0.75	070-2140	
RED 2141* 415v	2"	27	300 x 280 x 520	500/15	1.5	070-2141	
RED 2138* 415v	3"	50	300 x 280 x 550	700/15	2.2	070-2138	
RED 2139* 415v	3"	112	400 x 335 x 685	900/22	4	070-2139	

Self priming electric pump with flame proof motor for the transfer of fuels. Open impeller suitable for pumping diesel, gas oil, paraffin. NOT FOR PUMPING PETROL. A non-return valve is fitted on the inlet of the pump body to avoid the loss of liquid after the pump has stopped, making it easier to prime when the pump starts again. Maximum suction depth of 6 metres and a maximum liquid temperature of 60°C. Pump casing, inlet flange and impeller are made from cast iron. Stainless steel shaft. Viton mechanical seal and Viton check valve.

Manufactured in accordance with standards ATEX 94/9/CE. *** Available upon request**



Fuel Oil "Red"

DIESEL ENGINE DRIVEN DIESEL TRANSFER PUMPS

Available in 2" or 3".
Hatz engines. (Yanmar engines subject to availability).
For more information on these models see page 47

